



# The sanitary way to dispense chewable ice and water

- Exclusive Pure Ice® technology ensures protection from odor, bacteria and scaling.
- Touchless dispensing eliminates the risk of cross-contamination.
- Features soft, chewable Pearl Ice®.

## Features

- Up to 523 lbs (237 kg) production and 26 lbs (12 kg) storage capacity.
- Perfect for hospitals, health facilities and offices.
- Easily fills various sizes and types of containers.
- Quiet operation.
- Two-spout operation for increased productivity.

## **Options & Accessories**

WATER FILTERS									
lce Machine Model	Man	Inline							
	System	Replacement	System						
GEMD52O	N/A	N/A	IFI4C/IFI8C						
STAND									
Model	Finish	<b>Shipping Weight</b> Ibs (kg)	<b>Size</b> in. (mm)						
GDS5	Stainless Steel	60 (27)	26 x 22.5 x 30 (660 x 572 x 762)						

## Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Two years **Parts** and **Labor**.
- Five years **Parts** coverage on the compressor.

#### Ice Form



PEARL ICE

PEARL ICE DIMENSIONS								
H x Dia. (in.)	1/ <sub>2 x</sub> 3/ <sub>8</sub>							
H x Dia. (mm)	12.7 x 9.5							

c(UL)us (NSF)


## 24 Hour Ice Production

	GEM52OA / GEM525A
Based on Air/Water Temperatures	<b>Air-Cooled</b> 24 Hour Production – Ibs (kg)
70° F (21° C)/50° F (10° C)	523 (237)
90°F (32°C)/70°F (21°C)	409 (186)

## GEMD520/525 - PEARL ICE®/WATER DISPENSER



ł

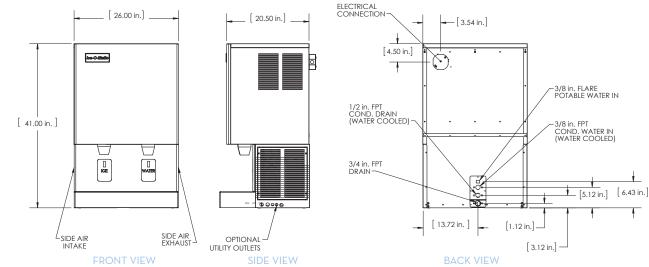

INSTALLATION NOTE: Allow 6" minimum space at sides and back for ventilation and utility connections.

### **Operating Requirements**

	MINIMUM	MAXIMUM		
	50 8	60 Hz		
Ambient Temp. Range Air	50°F (10°C)	100°F (38°C)		
Water Temp.	40°F (4.4°C)	100 F (38 C)		
Water Pressure	20 PSIG (1.4 BAR)	120 PSIG (8.3 BAR)		
Electrical Voltage	-5%	+10%		

#### **Dimensions**

ALL MODELS								
W x D x H (in.)	26 x 20.5 x 41							
W x D x H (mm)	660 x 572 x 1,041							

## **Specifications**

		Ice Production per 24 hrs		<b>Water Usage</b> gallons per 100 lbs of Ice 90°F air/70°F water	kWH Used				
Model Number	Cond. Unit	70°F air∕ 50°F water Ibs (kg)	90°F air/ 70°F water Ibs (kg)	Potable	per 100 lbs of ice @ 90°F air/ 70°F water	Voltage Characteristics	Min. Circuit Ampacity	Fuse Size	
GEMD52OA	Air	523 (237)	409 (186)	12	5.4	115/60/1	19.3	25	
GEMD525A	Air	523 (237)	409 (186)	12	4.5	220-240/50/1	11.5	15	

## Number of Vends (Servings) Per Hour From Full Bin + Recovery = Total Vends

Model Number	Bin Storage Ibs/kg	<b>1 Hour Recovery</b> Cap. lbs/kg	2 fl. oz Bin	2 fl. oz. Recovery	Total 2 fl. oz. Vends		4 fl. oz Recovery	Total ₄ fl. oz. Vends		6fl. oz. Recovery	Total 6fl. oz. Vends	8 fl. oz. Bin	8 fl. oz. Recovery	Total 8 fl. oz. Vends
GEMD52OA	26/12	22/10	416 +	349	= 765	208	+ 175 =	= 382	139 +	116 =	255	104 +	87 =	191
GEMD525A	26/12 GEMD525A	22/10	410 +	549	- /05	200	+ 1/5 ·	- 302	139 +	110 -	200	104 +		191

NOTES: • 1lb approx. = 32 fl. oz.

Vends per hour are based on 70°F Air/50°F Water

Approx. shipping weight = 260 lbs (118 kg)
Shipping carton = 30" x 24" x 46" (76 cm x 61 cm x 117 cm)